



| 7235 & 7236 SERIES

OVERLOAD SENSING CONTROLS, 7 1/2 - 400AMPS

Introduction

Klixon 7235 and 7236 overload sensing controls are designed for the remote sensing of overloads in aircraft electrical systems or other applicable remote systems. They are for the protection of 28 VDC circuits or for 120 VAC single-phase or three-phase circuits operating at 60 to 1000 Hz. For three-phase AC circuit protection, a 28 VDC control circuit is required. One three-phase relay or three single-phase relays with their coils wired in series may be used in the control circuit. With either arrangement, all three phases will trip open simultaneously when an overload exists in any one phase. Klixon overload sensing controls consist of a bi-metal thermal actuating disc in series with the load terminals and an auxiliary single-phase, double-throw switch fitted to the main base forming a compact vibration-proof construction. The aircraft relay is wired in series with the sensing control through the S2 terminal of the auxiliary switch. When the control senses an overload, the Klixon disc operates the auxiliary switch, breaking circuit S1-S2 and making circuit S1-S3. This opens the relay, thus opening the load circuit.



Features

- Current rating 7.4-400 amps
- High reliability: does not switch overload current
- Adaptable for AC, DC, single-phase or three-phase applications
- Stops nuisance trips: thermal element unaffected by transient current surges
- Can be mounted in a remote location
- Uses minimum space: small circuit breaker for size of electrical load
- Only faulted line circuits opened: coordination ratings insures that branch of circuit breakers trip first under fault conditions
- Typical use: remote sensing systems


SPECIFICATIONS

Vibration	1.52mm (0.06") total excursion, 10-55 cps
Mechanical Shock	25G
Acceleration	10G
Explosion Proof	3 cycles at 100 amps
Resistance	Corrosion: 15 hours (QQ-M-151A) Sand and dust: 4 hours
Short Circuit Rupture	Relay capacity: 5 cycles, 20 VDC, 40,000 ft. alt.
Amp Rating	7-50 amps: 2,000 amp adjusted circuit Over 50 amps: 4,000 amp adjusted circuit

	7235-1	7235-2	7236-1	7236-2
Rating (in amps)	7-125	7-125	150-400	150-400
(S1-S³) Resistance R¹	0.75 ohm	None	0.75 ofm	None
Continuous Current Capacity (S1-S³)	3 amps	10 amps	3amps	10amps
(S1-S³) Contact Rating	10 amps	10 amps	10 amps	10 amps



DIMENSIONS

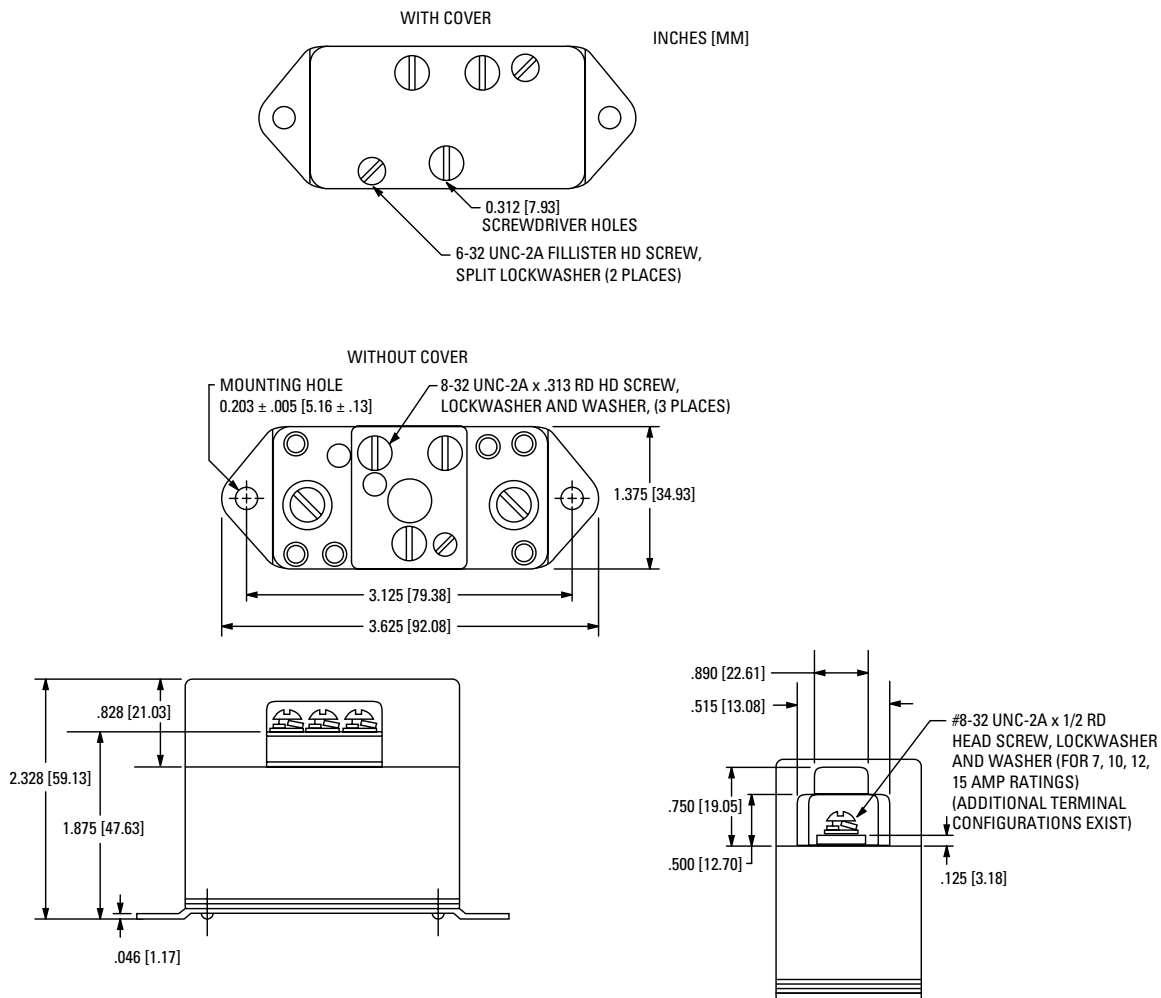

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

+1 (508)-236-3287
klixon@sensata.com

AUTHORIZED DISTRIBUTORS

Flame Enterprises
Bob Correa, Director of Product Management
+1 (240) 236-9802
bcorrea@flamecorp.com
info@flamecorp.com | Web
Tel: 1-800-854-2255 or 1-818-700-2905
Fax: 1-818-407-5080

Peerless Electronics
Steve Gunther, National Sales Manager

+1 (516) 594-3509
sgunther@peerlesselectronics.com
nysales@peerlesselectronics.com | Web
Tel: 1-800-285-2121
Fax: 1-800-222-8096

Europe, Middle East & Africa

Flame Enterprises
Bob Correa, Director of Product Management
+1 (240) 236-9802
bcorrea@flamecorp.com
info@flamecorp.com | Web
Tel: 1-800-854-2255 or 1-818-700-2905
Fax: 1-818-407-5080