


REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED
-	A	REVISED AND REDRAWN	6-23-67	R.M.
-	B	THREAD WAS 1/4-16 UNF-2A ALSO THD. LENGTH WAS .572-.552 AND ADDED NOTE ON DIELECTRIC STRENGTH.		
	C	SEE D.C.N. CRM16059	0.2.	1-5-99

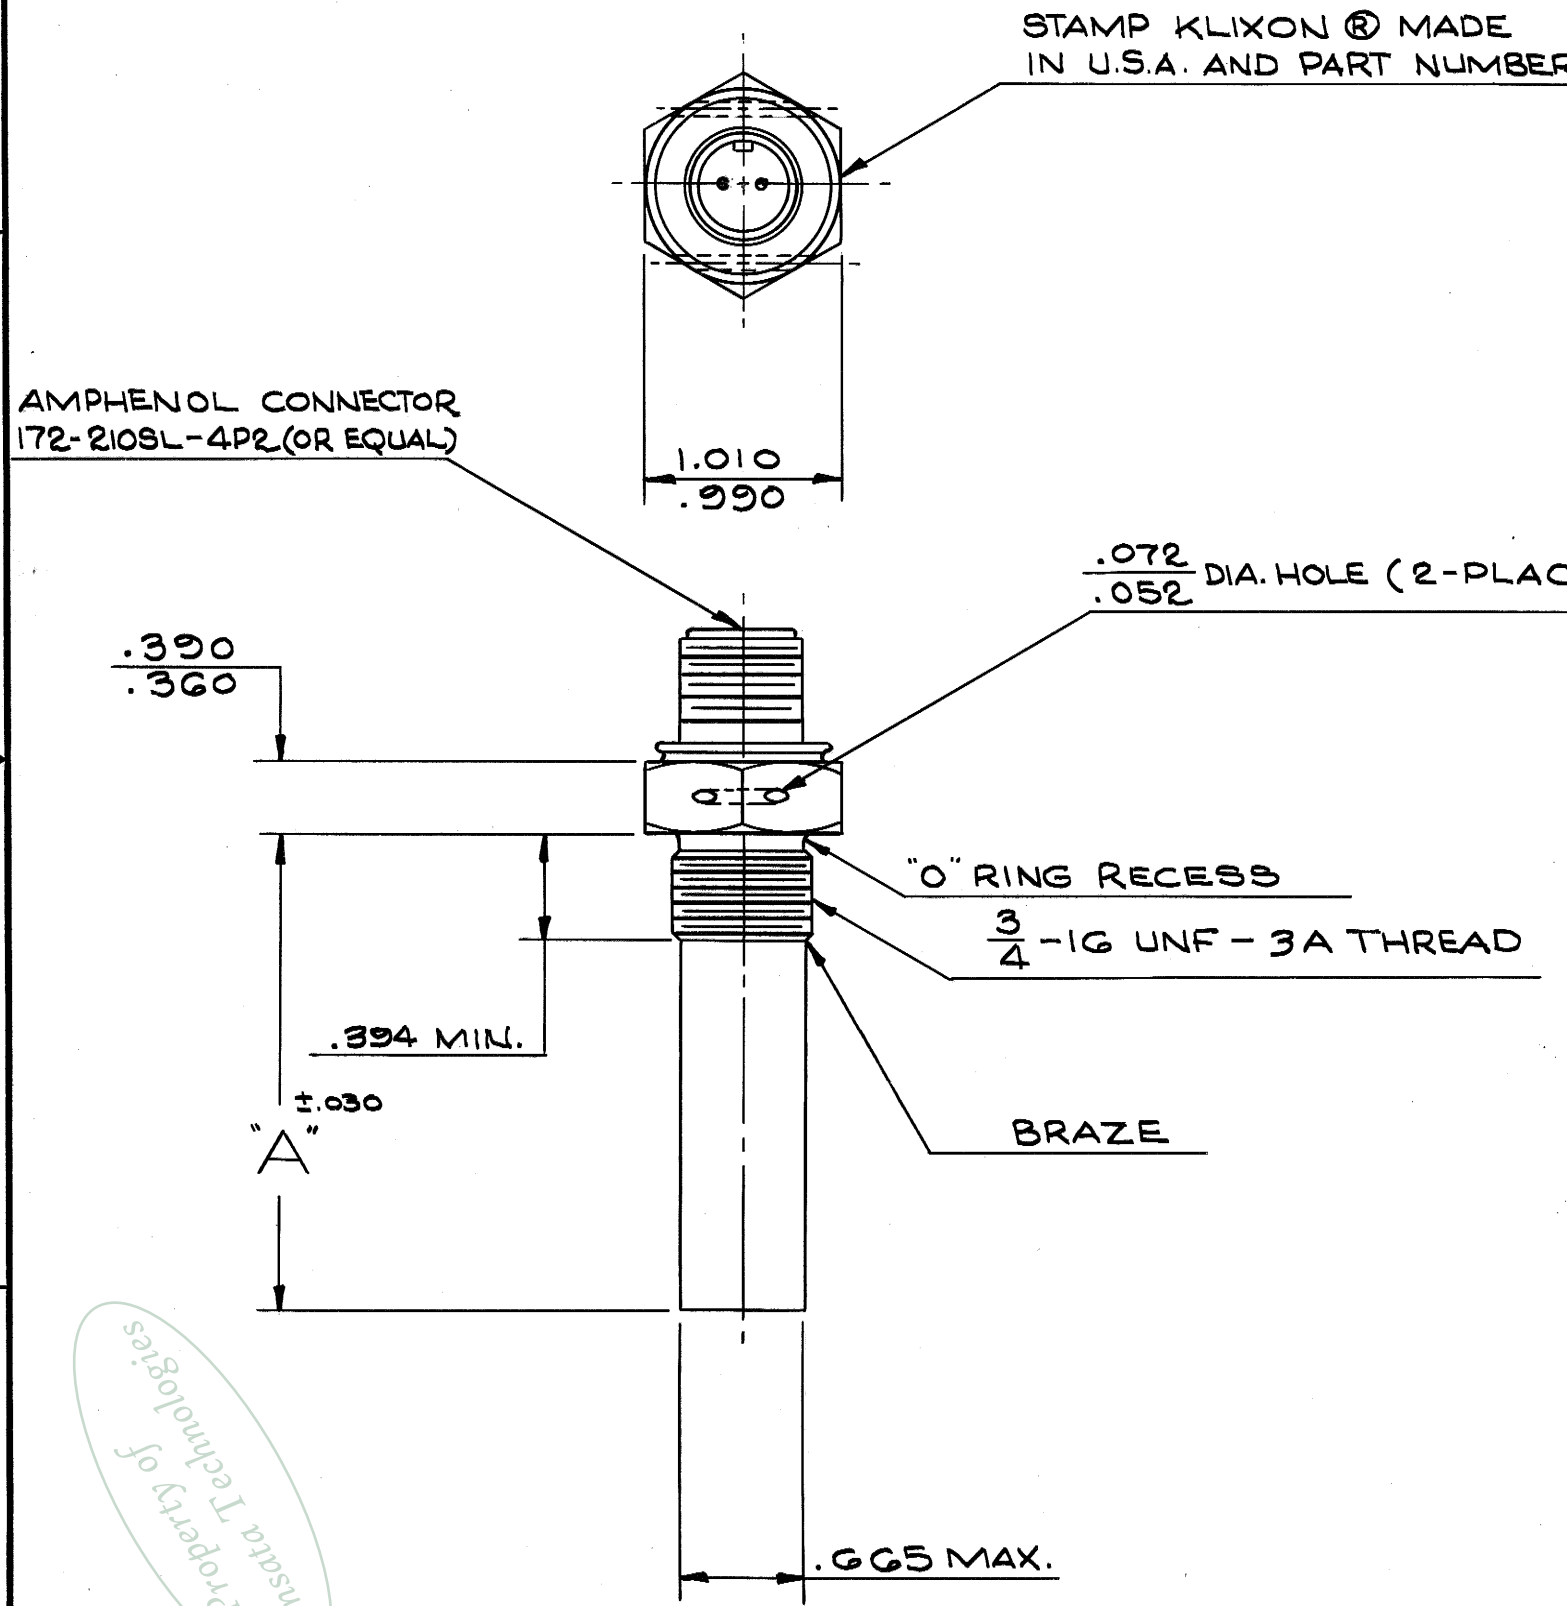

"A" AVAILABLE IN 1/2" INCREMENTS FROM 1.5" TO 6"

OPERATING TEMPERATURE:  
 CLOSE ---°F ± --°F  
 OPEN 2°-5° ABOVE OR BELOW CLOSING TEMPERATURE

MATERIAL: 300 SERIES STAINLESS STEEL.

FINISH:

DIELECTRIC STRENGTH: 1250 VAC FOR 1 MIN. TERMINAL TO CASE.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		BY R.J. MULHERN	DATE 6-23-67	Q16-1	Q4-1	P3-1	PI-2
TOLERANCE ON FRACTIONS DECIMALS ANGLES ±1/32 ±.062 ±5°	MATERIAL	CH.	ENG.	METALS & CONTROLS INC. ATTLEBORO, MASSACHUSETTS, U.S.A. A CORPORATE DIVISION OF <b>TEXAS INSTRUMENTS</b> INCORPORATED			
		APPROVED <i>R.J. Mulhern</i>		SIZE B	CODE INDENT NO. 82647	21546	
				SCALE FULL	SHEET		

THIS DWG. SUPERSEDES 21546 1ST ISSUE DATED 7-15-63