


Property of  
Sensata Technologies

REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED
-	-	1/1 ISSUE	6-28-67	R.M.
-	A	ADDED NOTE ON DIELECTRIC STRENGTH	11-3-69	R.M.
-	B	SEE D.C.N. CRM16059	1-5-94	D.R.

STAMP KLIXON ® MADE  
IN U.S.A. AND PART NUMBER

AMPHENOL CONNECTOR  
172-2105L-4P2 (OR EQUAL)

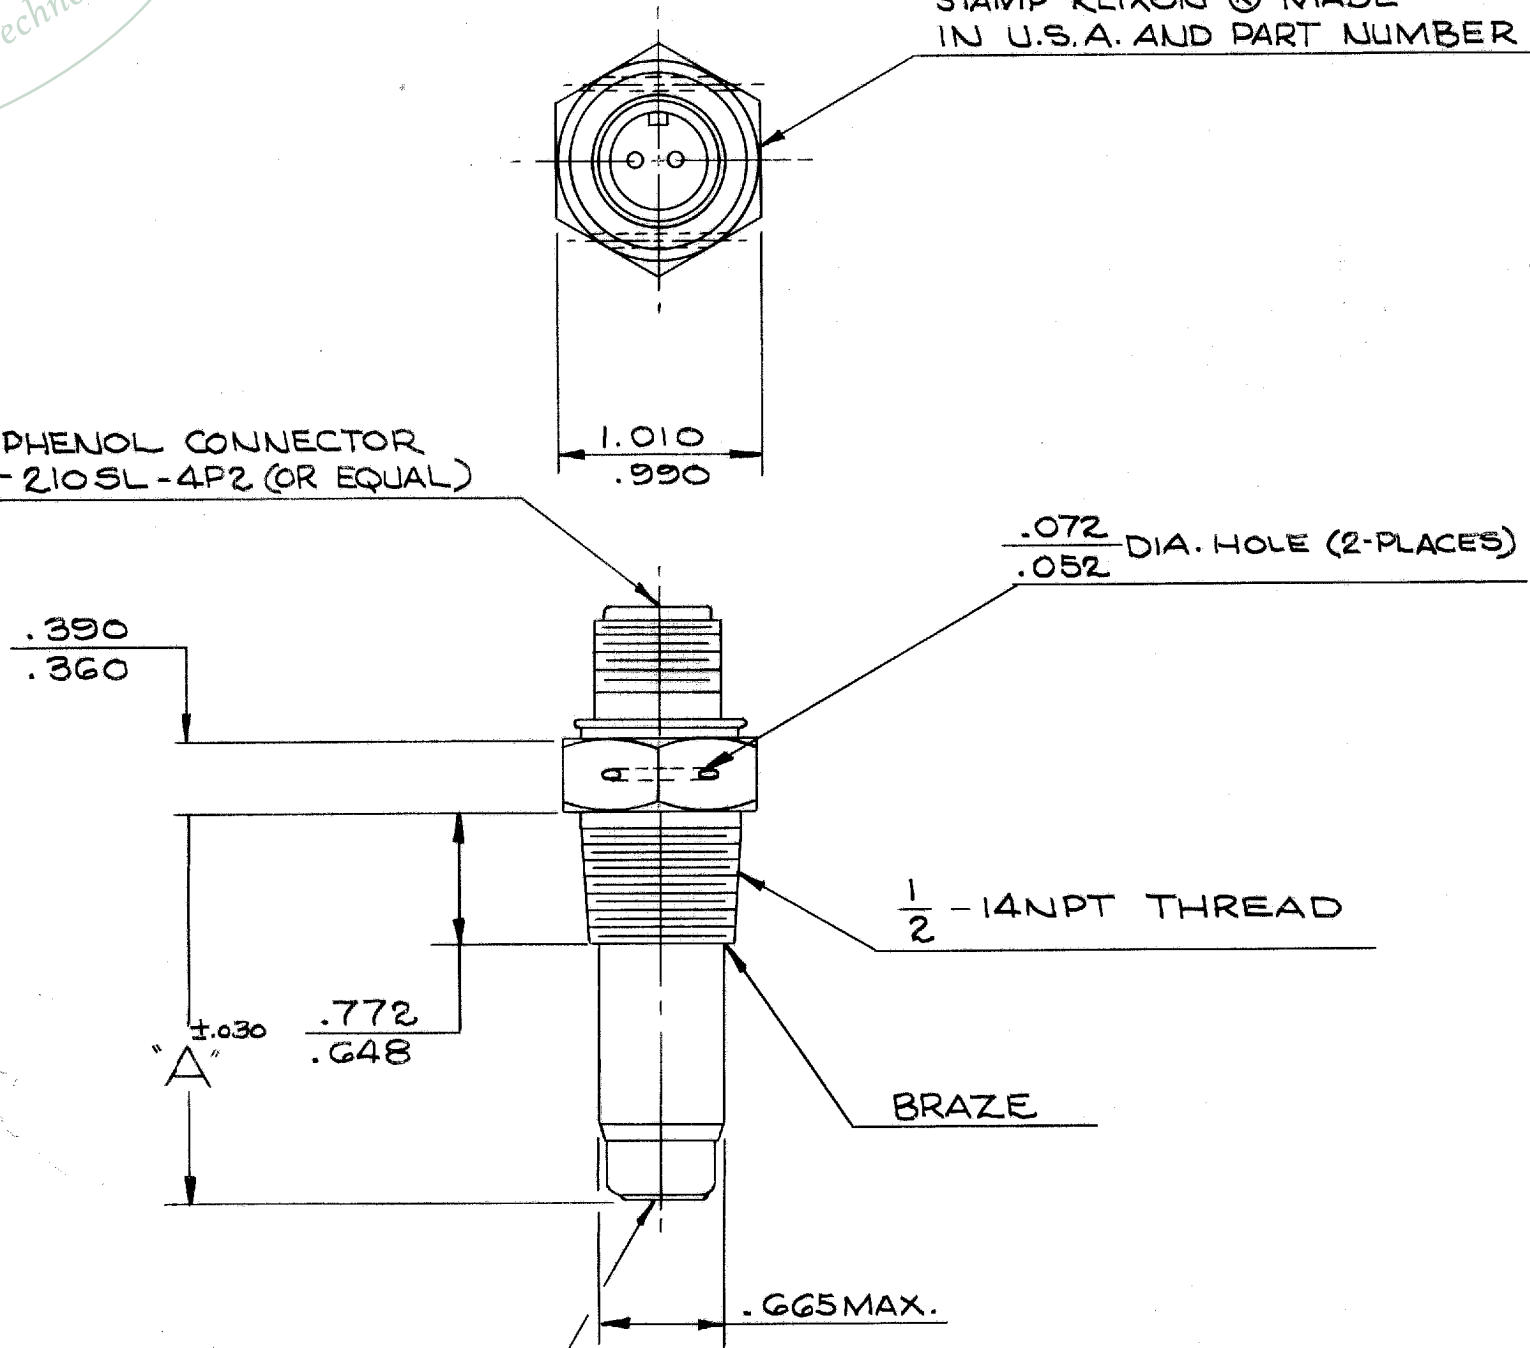

"A" AVAILABLE IN  $\frac{1}{2}$ " INCREMENTS FROM  
1.5" TO 6"

OPERATING TEMPERATURE:  
CLOSE ---°F  $\pm$  ---°F  
OPEN ---°F  $\pm$  ---°F

MATERIAL: 300 SERIES STAINLESS STEEL.

FINISH:

DIELECTRIC STRENGTH: 1250 VAC FOR 1 MIN. TERMINAL  
TO CASE.

BASIC THERM. M1 TYPE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		BY R.J. MULHERN	DATE 6-28-67	Q161 Q4-1 P13-1 P1-2	
TOLERANCE ON FRACTIONS DECIMALS ANGLES $\pm \frac{1}{32}$ $\pm .062$ $\pm 5^\circ$		CH.		METALS & CONTROLS INC. ATTLEBORO, MASSACHUSETTS, U.S.A. A CORPORATE DIVISION OF TEXAS INSTRUMENTS INCORPORATED	
MATERIAL		ENG.		KLIXON CONTROL PRODUCTS GROUP	
APPROVED <i>R.J. Mulhern</i>		STANDARD PROBE TYPE THERMOSTAT ENVELOPE DRAWING		SIZE B	
				CODE INDENT NO. 82647	
				21549	
		SCALE FULL		SHEET	